Servo Softgel Machine

1. Animal Softgel for High Output

2. Providing an additional Ethernet port and address mapping service to meet customer's SCADA communication system

3. Easy to change the filling volume on the touch screen (EFA)

4. Auto Gel Thickness control system included (AGT)

5. Linear motor type medicine pump drive

880SR

SPECIFICATION

Dimension: 2,409(L) x 1,338(W) x 2,362(H) mm

Weight: 2,200 KG

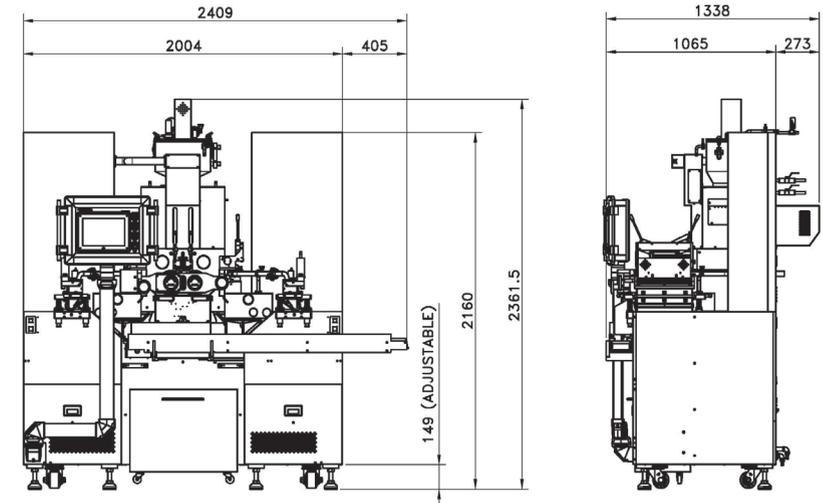**Electric Power:** AC 220, 380, 440 V / 50, 60Hz / 3 Ph

Power Consumption: 28 kW

Die Roll Speed: 6 rpm

Compressed Air: 5 kg f/cm²

Die Roll Size: Ø150 x 320 mm

Productivity: AVG. 110,000 caps/hr at 6 rpm (Ob#20)

Die Roll Housing

AGT

Wide Wedge