



LEAFLET TOPserter

CVC 318F



CVC 318F are designed for the emerging trend of package reducing in pharmaceutical and nutraceutical industry, external carton is unnecessary for leaflet insertion anymore.

STANDARD FEATURES

- Controlled by Siemens PLC and a Touch-screen panel is provided as the HMI.
- Optional Camera System for outserter optical inspection ensures correctness of Bar Codes printed on leaflets and no leaflets are missing on the bottles.
- Construction fully responds to strict FDA guidelines for bottles and leaflets.
- Optional SIEMENS Control System, available with 21CFR Part 11 Solutions.




CVC 318F Technical Specifications

Type	U4
Productivity	Up to 100-120 BPM (base on 40-100 cc round bottle, subject to trial confirmation)
Applicable Size	Bottle: Dia.: Ø30-120 mm (1 1/4" to 4 1/2") with Cap Height: 50-200 mm (2" to 7 3/4") Manual: Length: 25.4-38.1 mm (1" to 1 1/2") Width: 25.4-38.1 mm (1" to 1 1/2") Height: 3-14 mm (1/8" to 1/2")
Power Source	220 V, 50/60 HZ, 1 PH
Power Consumption	5,000 VA (22.8 A) (Including hot melt feeder system)
Air Pressure	6 bar (87 psi)
Air Consumption	233 NL/min (8.2 CFM)
Machine Dimensions (L x W x H)	1,425 x 1,200 x 1,935 mm (approx) (4'-8" x 3'-11" x 6'-4")
Machine Weight	191 kg (421 lbs)
Noise Level	≤ 70 dB


Technical data contained in this material are not binding and may be subject to change without prior notice.

MACHINE LAYOUTS

Top View

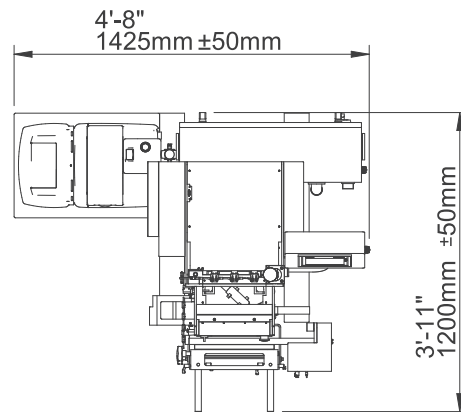

Front View

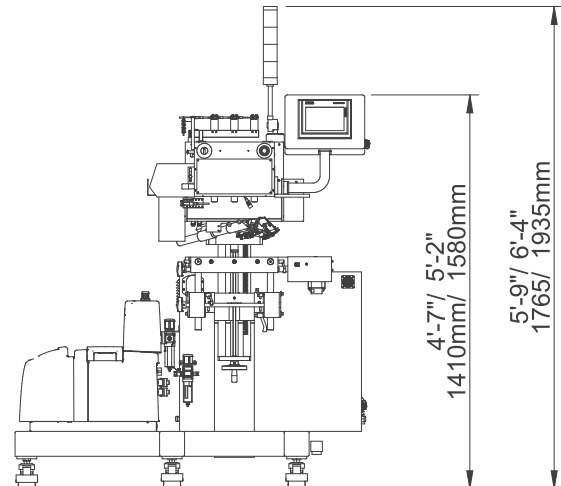

Technical data contained in this material are not binding and may be subject to change without prior notice.



• Bottle Infeed Screw Changeover



Contact Us

USA

10861 Business Drive, Fontana, CA 92337
Phone: +1 (909) 355-0311
www.cvcusa.com ; www.cvctechnologies.com
sales@cvcusa.com

Taiwan-Asia Pacific Headquarters

Phone: +886 (4) 2496-3666
sales@cvctechnologies.com

India

Phone: +91 (22) 2562-1242, +91 (22) 2562-1243
sales@cvctechnologies.com

China

Phone: +86 (512) 8363-6368
sales@cvctechnologies.com